

APPROVED	O.G. FIG. 5	
BY	CLASS	SUB CLASS
DRAFTSMAN	451	444

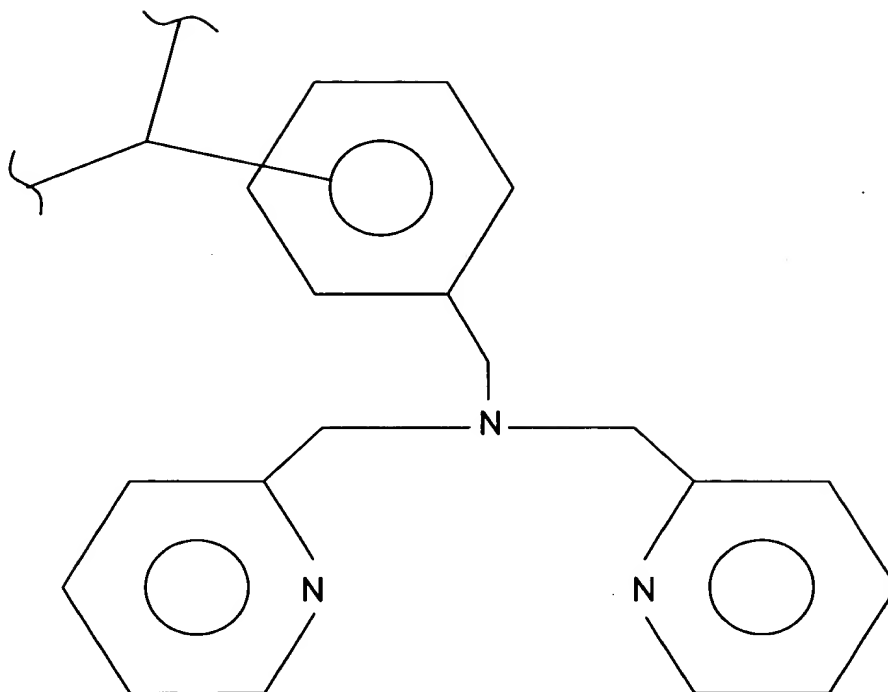


FIG. 1
(PRIOR ART)

TOP SECRET

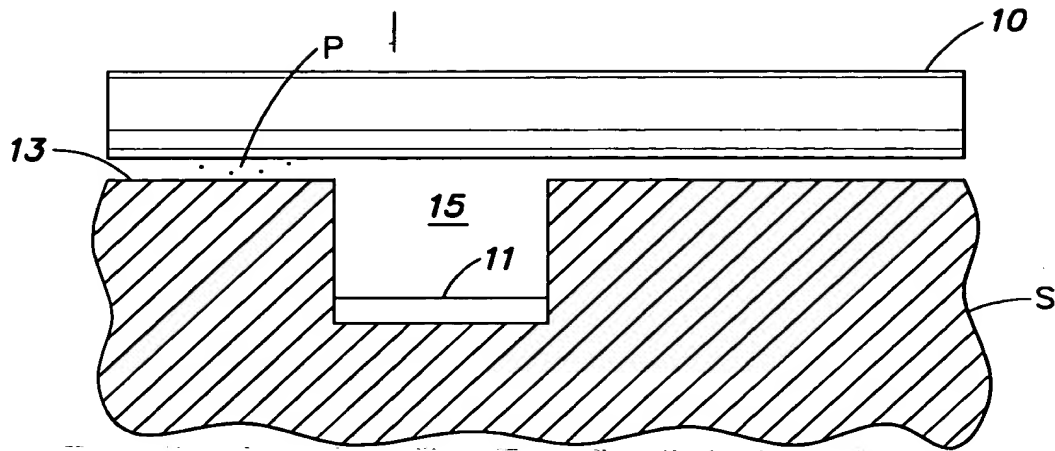


FIG. 2

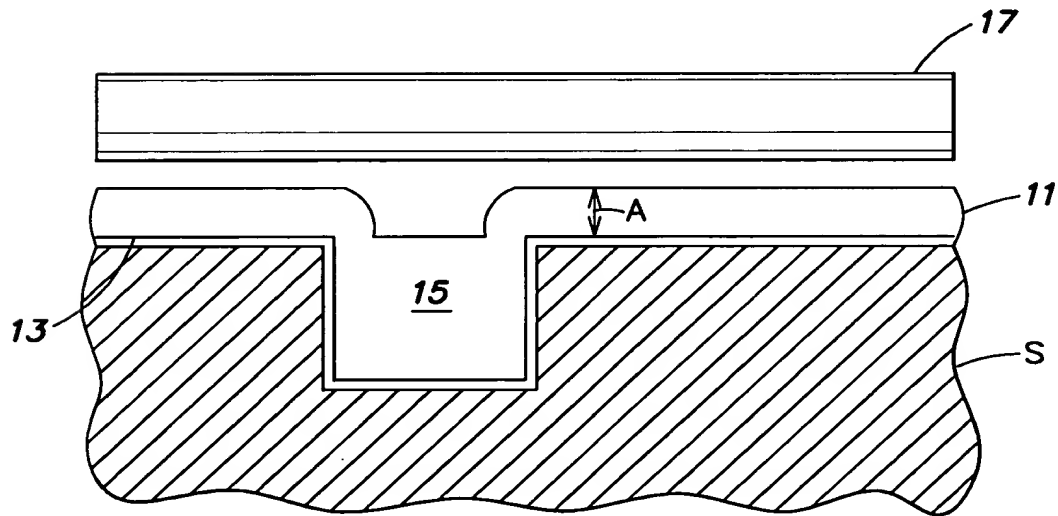



FIG. 3

FIG. 2

APPROVED	O.G. FIG.	
BY	CLASS	SUB CLASS
DRAFTSMAN		



100a



START

APPLY A 3% TO 5% AMMONIA OR
AMMONIUM HYDROXIDE SOLUTION
TO THE INVENTIVE SCRUBBER
BRUSH OR POLISHING PAD

101

RINSE THE SURFACES OF
THE INVENTIVE SCRUBBER
BRUSH OR POLISHING PAD
WITH DEIONIZED WATER

103

APPLY DILUTE SULFURIC
ACID TO THE SURFACES OF THE
INVENTIVE SCRUBBER BRUSH
OR POLISHING PAD

105

STOP

FIG. 4A

APPROVED	O.G. FIG.	
BY	CLASS	SUE CLASS
DRAFTSMAN		

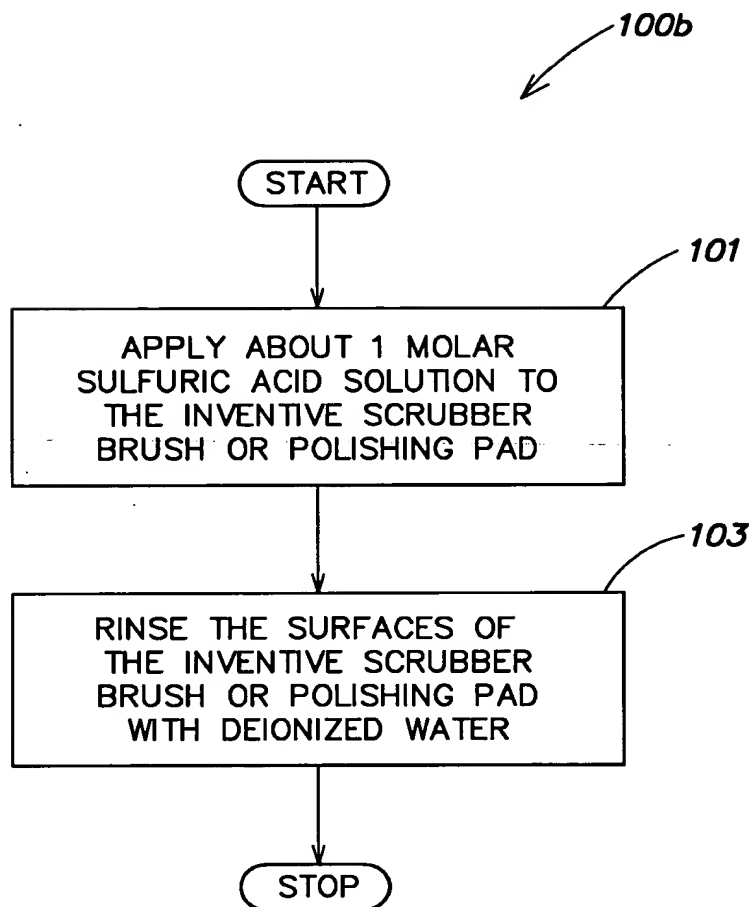


FIG. 4B

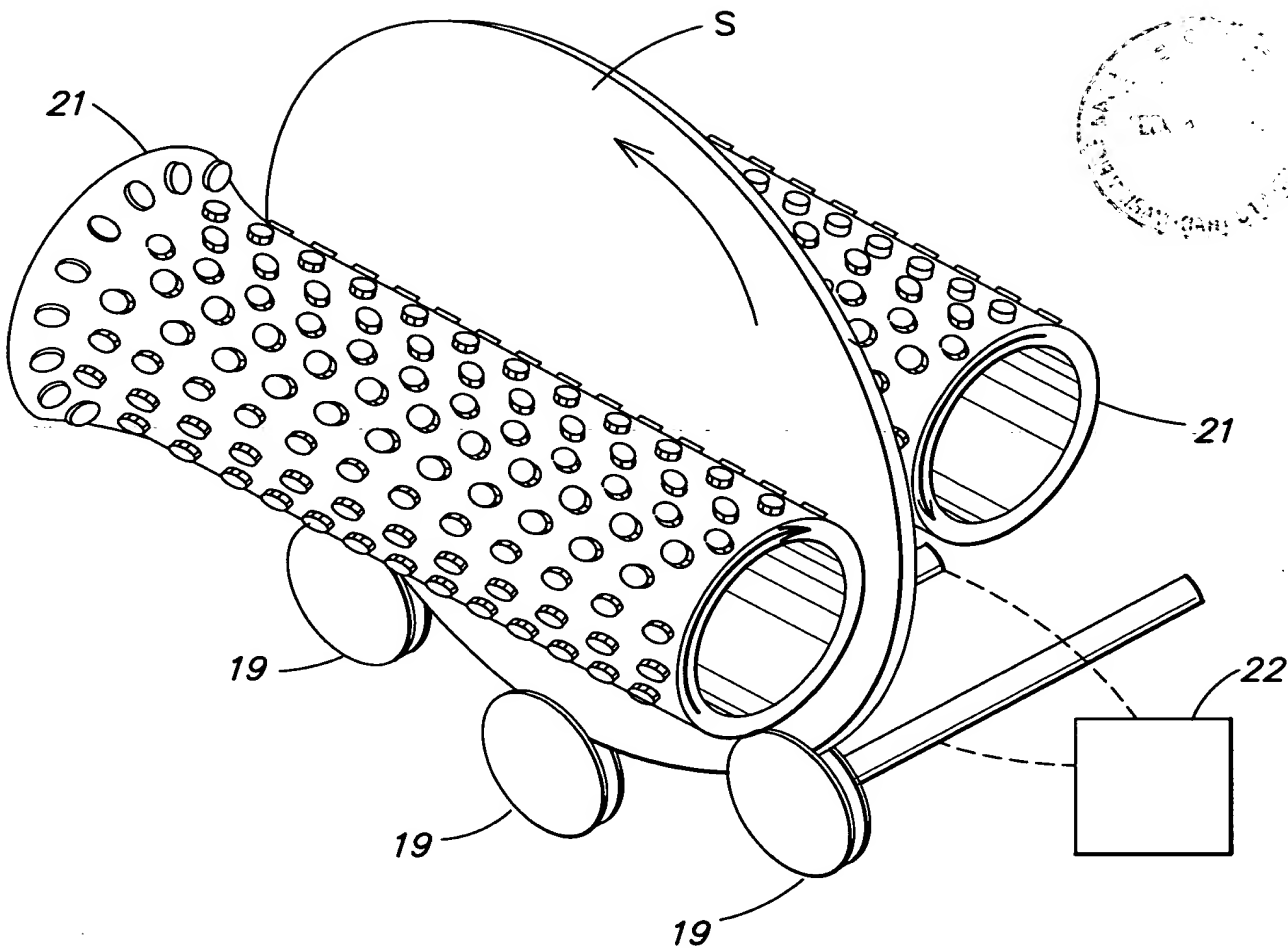


FIG. 5

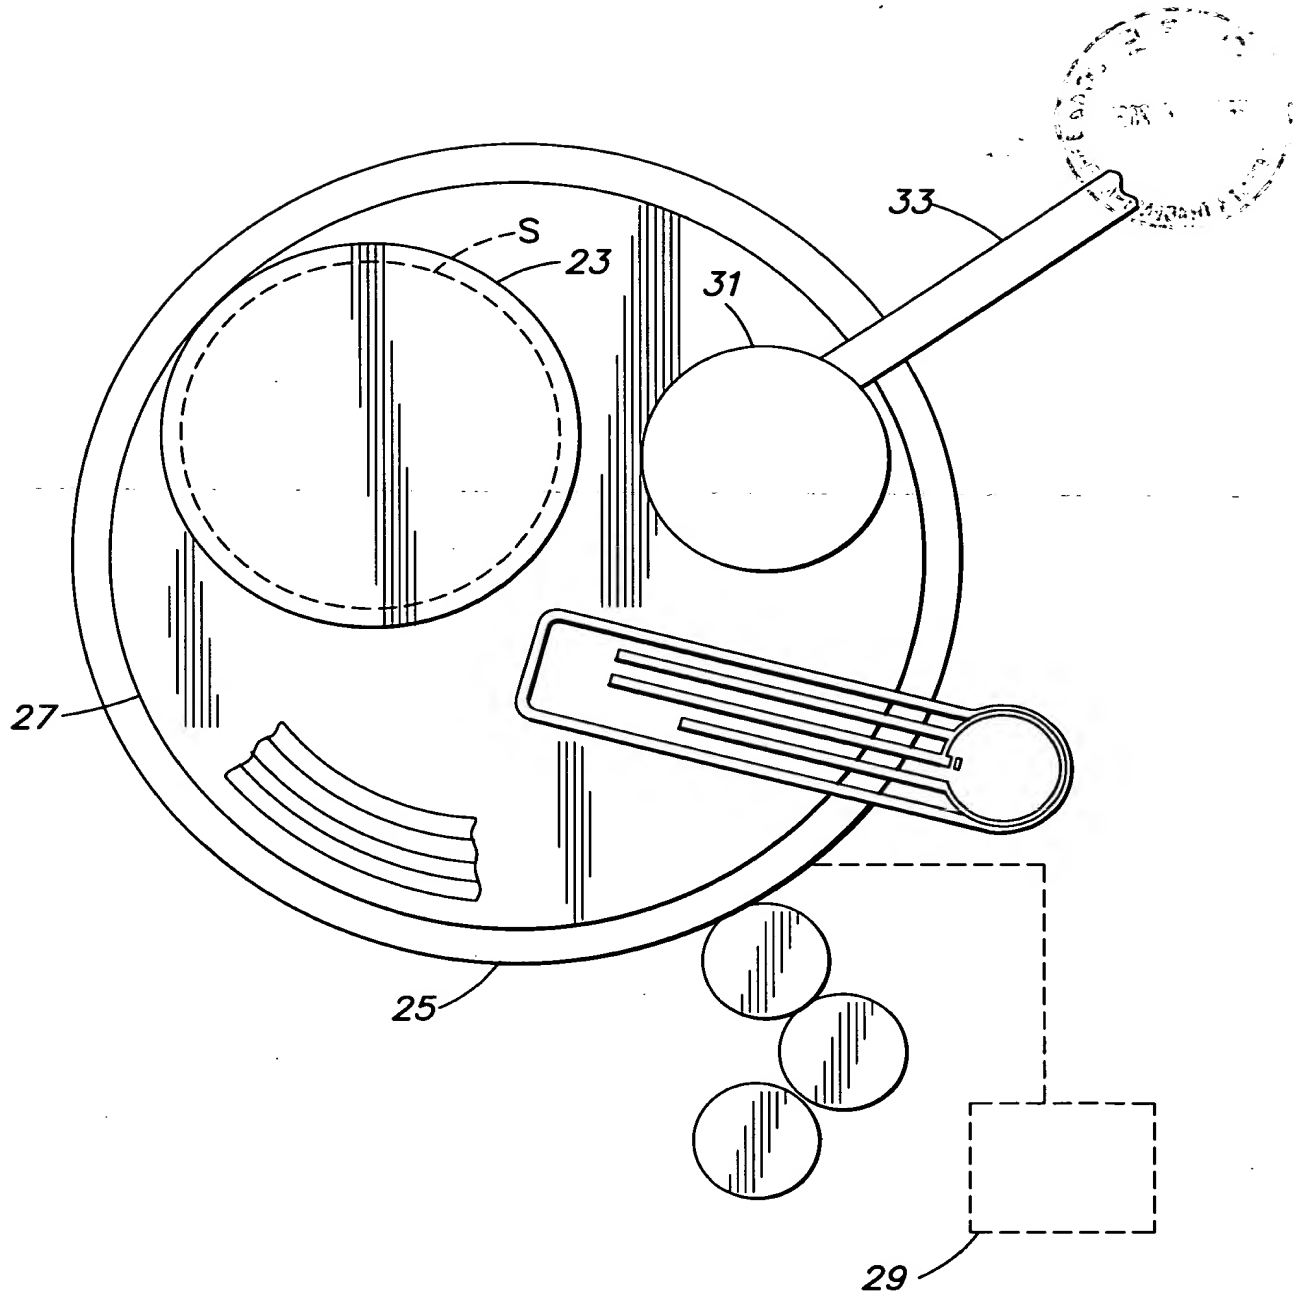


FIG. 6

APPROVED	O.G. FIG.	
BY	CLASS	SUB CLASS
CRISTMAN		

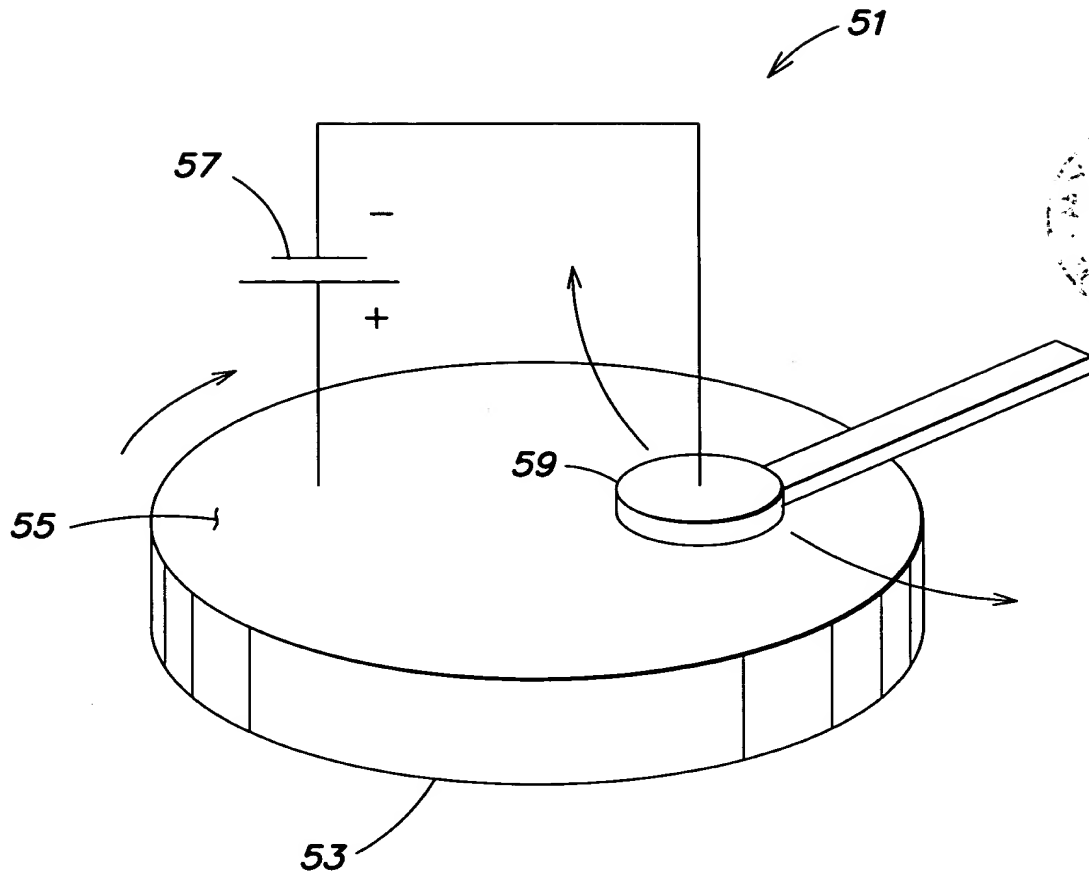


FIG. 7